


ECO D-111 安防把手



产品描述

基于标准检测	EN 1906
9 mm四方棒基于DIN 18273检测	■
通过防火检测	■
可用于逃生门	EN 179 
复位弹簧	DIN 18 257
滑动轴承技术	■
钢制底板设计及含有安装凸台	■
内置式对穿螺丝固定	■
适用于DIN左/右手门安装	■

■是 -否 □可选

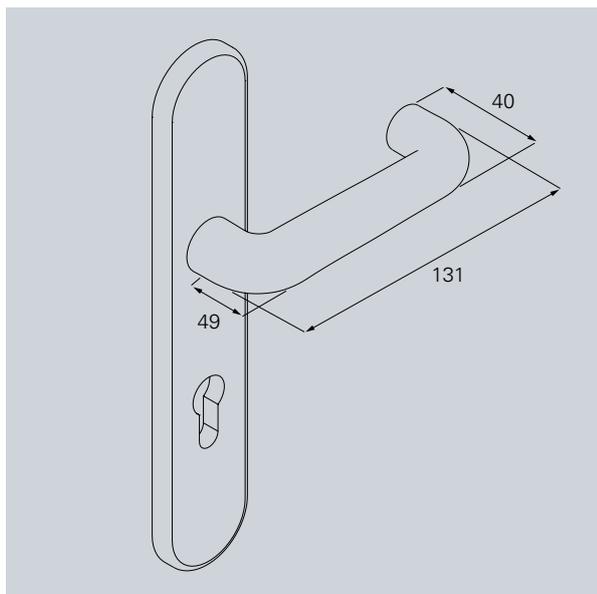

材质:



产品系列 D-100

标准把手套件

连体式把手套件



D-110 . 页码 184



D-120 . 页码 196



D-190 . 页码 202



D-110 . 页码 187,193



D-110 . 页码 190

型材门把手套件

安防把手套件

窗把手套件



D-115 . 页码 250



D-116 . 页码 254



D-110 . 页码 310



D-111 . 页码 320



D-116 . 页码 332



D-110 . 页码 340

D-111 长面板安防把手 ES 0




D-111 OGL 滑动轴承长面板安防把手 ES 0

防盗安全 ES 0/ 级别 1; 可选择 K-130 或者 G-160 拉手。


使用级别 3 级

外侧安装高度 (可接受 11 mm 询问) PZ 配塑胶锁芯垫。

可接受防火 92 询问

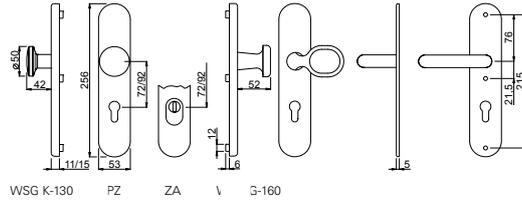

OGL 长面板安防把手



	Ø	孔距	▧	PZ 组合方式			ZA 组合方式		
									
	20 mm	72 mm	8 mm	715311.30	715341.30	715321.30	715312.30	715342.30	715322.30
	20 mm	88 mm	8,5 mm	715911.30	715941.30	715921.30	715912.30	715942.30	715922.30
	20 mm	92 mm	10 mm				745512.30	745542.30	745522.30

表面处理: 铝合金阳极氧化 F1 色, 可接受其它颜色的询问。

茵科门控（珠海保税区）有限公司

地址：广东省珠海保税区天科路锦天楼

邮编：519030

电话：+86 0756 8819918

传真：+86 0756 8819580

info@eco-schulte.cn

www.eco-schulte.cn